


Specifications

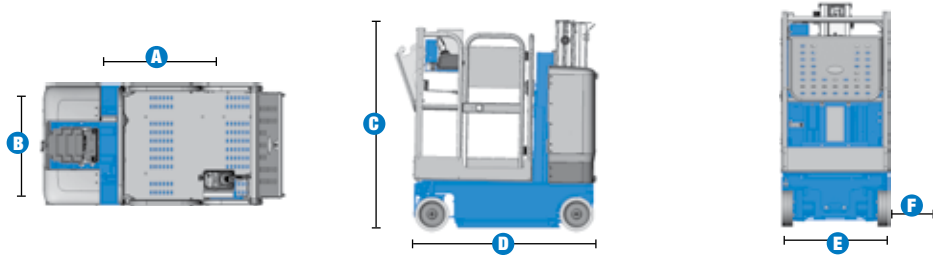

MODELS	QS™-12		QS™-15		QS™-20	
MEASUREMENTS	Metric	US	Metric	US	Metric	US
Working height*	5.28 m	17 ft 4 in	6.35 m	20 ft 10 in	7.85 m	25 ft 9 in
Platform height	3.45 m	11 ft 4 in	4.52 m	14 ft 10 in	6.02 m	19 ft 9 in
A B Platform dimensions (length x width)						
With tray down	0.89 x 0.73 m	35 x 28.75 in	0.89 x 0.73 m	35 x 28.75 in	0.89 x 0.73 m	35 x 28.75 in
With tray up	1.4 x 0.73 m	56 x 28.75 in	1.4 x 0.73 m	56 x 28.75 in	1.4 x 0.73 m	56 x 28.75 in
C Height - stowed	1.57 m	5 ft 2 in	1.57 m	5 ft 2 in	1.98 m	6 ft 6 in
D Length - stowed	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in
E Width	0.75 m	2 ft 5.5 in	0.75 m	2 ft 5.5 in	0.80 m	2 ft 7.5 in
F Ground clearance - centre	0.06 m	2.5 in	0.06 m	2.5 in	0.06 m	2.5 in

PRODUCTIVITY						
Lift capacity	227 kg	500 lbs	227 kg	500 lbs	159 kg	350 lbs
Drive speed - stowed	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%	30%	30%	30%	30%	30%
Turning radius - inside	zero	zero	zero	zero	zero	zero
- outside	1.42 m	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m	4 ft 7 in
Raise / lower speed	20 / 18 sec	20 / 18 sec	21 / 19 sec	21 / 19 sec	24 / 21 sec	24 / 21 sec
Controls	24V DC proportional		24V DC proportional		24V DC proportional	
Tyres - solid non-marking	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in

POWER						
Power source	24V (four 6 V 225 Ah maintenance-free batteries)					
Hydraulic system capacity			8.33 L	2.2 gal		

WEIGHT***						
Retail (R) configuration	730 kg	1,609 lbs	1,007 kg	2,220 lbs	1,124 kg	2,479 lbs
Warehouse (W) configuration	717 kg	1,581 lbs	994 kg	2,192 lbs	1,112 kg	2,451 lbs

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, EN 280

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- Stockpicker platform with dual side entry gates and front folding tray

POWER

- 24V (four 6V 200 Ah maintenance-free batteries)

TYRE

- Non-marking solid tires

PRODUCTIVITY (Retail configuration only)

- Dual flashing beacons
- Obstruction sensing pad

STANDARD FEATURES

MEASUREMENTS

QS™-12R & QS™-12W

- 17 ft 4 in (5.28 m) working height
- 11 ft 4 in (3.45 m) platform height
- Up to 500 lb (227 kg) lift capacity

QS™-15R & QS™-15W

- 20 ft 10 in (6.35 m) working height
- 14 ft 10 in (4.52 m) platform height
- Up to 500 lb (227 kg) lift capacity

QS™-20R & QS™-20W

- 25 ft 9 in (7.85 m) working height
- 19 ft 9 in (6.02 m) platform height
- Up to 350 lb (159 kg) lift capacity

STANDARD FEATURES

PRODUCTIVITY

- Stockpicker platform with dual side entry gates and front folding tray
- Auxiliary platform lowering
- Low 15.5 in (0.39 m) platform entry height
- Patented rigid mast system
- Enclosed platform cables
- Compact base 29.5 x 53 in (0.75 x 1.35 m) (QS™-12 & QS™-15 only)
- Fully proportional lift and drive controls
- Battery charge indicator
- On-board diagnostic system
- AC power to platform
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear ABS covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Overhead crane attachment point
- Large forklift pockets access
- Flashing beacons
- Obstruction sensing pad (Retail configuration only)
- Motion alarm

POWER

- Automatic 25 amp battery charger
- 6 ft (1.8 m) charger cord



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Dual bike hooks

Genie Australia – Toll free number 1800 788 633

Brisbane (Head Office)
33 Kimberley Street
Darra QLD 4076

Sydney
74 Glendenning Road
Glendenning NSW 2761

Melbourne
374 Hammond Road
Dandenong VIC 3175

Perth
126 Sheffield Road
Welshpool WA 6106

Genie United States Distributed by:

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington
98073-9730

Effective Date: April 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operators' Manual for instructions on the proper use of this equipment. Failure to follow the Operators Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation, Terex South Dakota, Inc., and/or their subsidiaries in the USA and other countries. All rights reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. in the USA and many other countries. ©2009 Terex Corporation.